


# CLASS D PLUG & PLAY AMPLIFIER IMPULSE 4.320

ULTRA COMPACT AMPLIFIER  
4/3/2 channel mode



- Powerful 4-channel class D amplifier
- Easy wiring, ISO compatible
- Door panel noise and vibration control
- Dedicated subwoofer compatibility settings

## MECHANICAL DRAWING

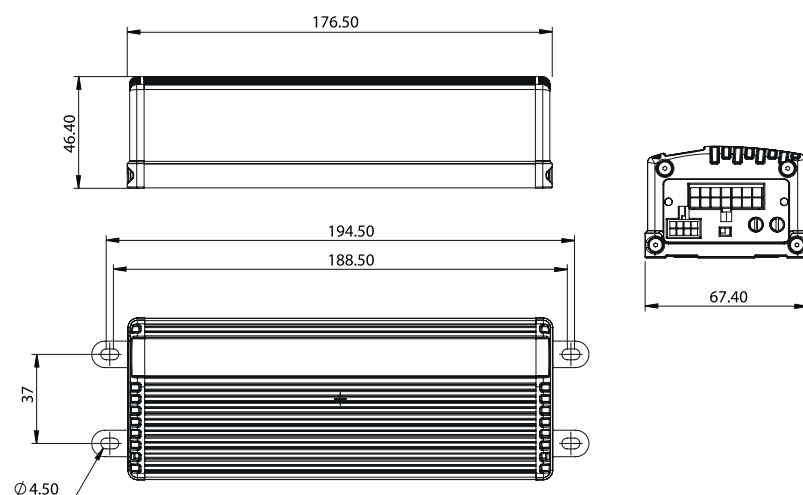

## SPECIFICATIONS

### AUDIO SPECIFICATIONS

CEA power (4Ω)	4x55Wrms
Max. power (2Ω)	4x80Wrms
Power bridged (4Ω)	2x160Wrms
Bandwidth (-3dB)	10Hz - 20kHz
THD	0.02%
SNR (1W/A)	> 80dB

### GENERAL FEATURES

Crossover	Channel 1/2 : fixed HP 75Hz Channel 3/4 : LPF/HPF : 40Hz/200Hz
Phase	0 to 180° linear
Full-range function	✓
Mirror mode	✓
Standby current (A)	0.8A
Protections	Short circuit/low impedance/reverse polarity/DC/voltage drop/ overheat protection
Dimensions (LxHxI)	6 <sup>7/8</sup> '' x 2 <sup>5/8</sup> '' x 1 <sup>7/8</sup> '' (175x66.5x47mm)
Weight (kg)	1.2 lbs (0.55kg)
Operating voltage range	8 to 16V